

TEMPERATURE SENSORS



low cost temperature protection for heavy duty applications

- TUNNELS
-
- MINING
-
- TRENCHES
-
- VESSELS
-
- CONTAINERS
-
- PROCESS PLANTS
-
- STORAGE AREAS
-
- CONFINED AREAS



compact

Small and easy to install, these sensors provide temperature protection in areas where space is limited.

rugged

Designed for use in harsh working environments and hazardous areas.

choice

Semiconductor sensor or platinum resistance sensors.


cost-effective

Maximum reliability for machine condition monitoring.


technical and electrical data...

- Standard temperature sensor with choice of angled or in-line header.
- General purpose machine protection.
- Standard probe length is 124mm. (100mm INSERTION depth). Other lengths can be supplied to order.
- Maximum pressure: 100 bar.

TX2071 ANGLED SENSOR PROBE

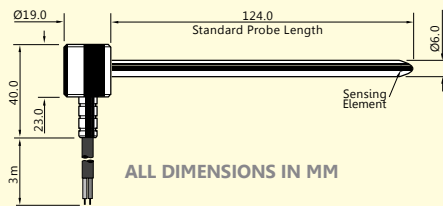


TX2072 IN-LINE SENSOR PROBE

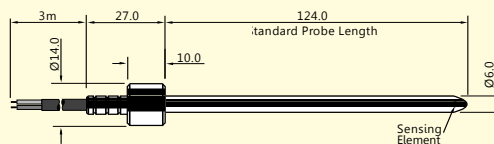

- Surface temperature sensor: transformers, motors, enclosures, brake shoes, bearings, tanks, covers, vessels.

TX2075 SURFACE PROBE



SEMI-CONDUCTOR ELEMENT

0...100°C (11)
Accuracy: 2%
Device: KTY 21-6
R at 25°C = 1000 ohms

OR

0...200°C (12)
Accuracy: 2%
Device: KTY 84
R at 100°C = 1000 ohm

PT100 ELEMENT


***0...200°C** (13)
Accuracy: 0.1%.
R at 0°C = 100 ohms
R at 100°C = 138.5 ohms
DIN 43760.
BS1904 Class B.
***N.B.** Use part of the span for lower temperature ranges.

CONNECTIONS



3m x 2 core,
1mm² PTFE insulated flexible cable.
Max. Temp: 220°C.

CONNECTIONS



3m x 4 core,
1mm² PTFE insulated flexible cable.
Max. Temp: 220°C.

...simple
safety
monitoring

highly cost-effective, singleway and multiway temperature monitoring modules and systems...



TX9010 Series



TX9030/TX9130 Series



TX9042/TX9044

...simple
safety
monitoring

order reference...

- TX2071 ANGLED SENSOR PROBE**
- TX2072 IN-LINE SENSOR PROBE**
- TX2075 SURFACE SENSOR**

Please specify:

SENSING DEVICE

KTY21-6	• 0...100°C	(11)
KTY84	• 0...200°C	(12)
PT100	• 0...200°C	(13)

Non standard probe lengthmm
Non standard cable length metres

accessories...

CABLE PROTECTION

All temperature probes can be supplied with additional cable protection for arduous operating duty and heavy machinery applications.

High temperature PVC sheathed, flexible conduit provides maximum protection against shock and impact and is completely impervious to dust and fluids.

Supplied complete with compression couplings.


Cable protection is normally factory fitted but can also be fitted on site if preferred.

TX2001 FLEXIBLE CONDUIT

- High grade flexible conduit.
- Electro galvanised steel spiral with PVC sheath.
- Temperature: -20...110°C. Supplied in metre length units.
- Please specify length required.*


TX2002 COMPRESSION COUPLING

- M16 waterproof compression coupling.
- Nickel plated brass.
- (Supplied with M20/M16 reducer).

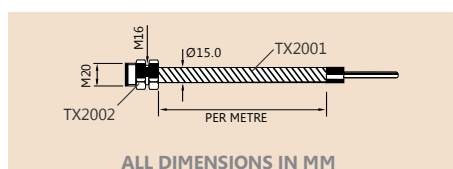

mounting options...

TX2073 MOUNTING BUSH

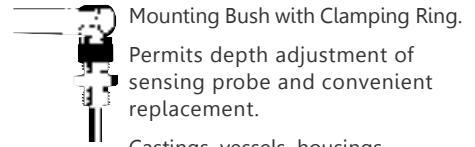


Mounting Bush with Clamping Ring. Permits depth adjustment of sensing probe and convenient replacement.

Castings, vessels, housings, bearings, brake shoes, etc.


Maximum Pressure: 100 bar.

Material: Brass.

Probe Length = Insertion depth +24mm.

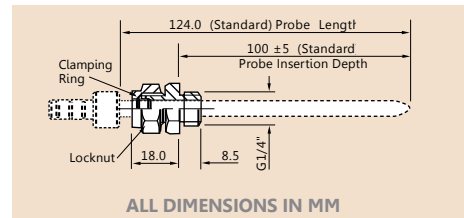

TX2074 MOUNTING POCKET




Thermo Pocket with Clamping Ring. Permits removal of sensing probe when used in vessels and pipes.

Maximum Pressure: 100 bar.

Material: Brass.

Probe Length = Insertion depth +24mm.

Please specify insertion depth if non standard).

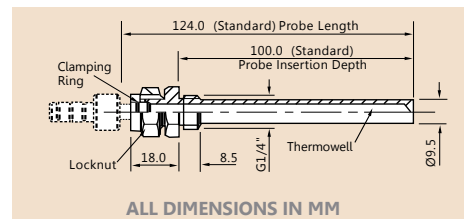

TROLEX LIMITED
NEWBY ROAD, HAZEL GROVE, STOCKPORT,
CHESHIRE SK7 5DY, UK
+44 (0)161 483 1435
sales@trolex.com
www.trolex.com